




EXPOSED
FASTENING
SYSTEMS

PBD

The PBD panel is an exposed fastened panel system that can be used for roof and wall applications. When used in wall applications, panels can be installed vertically or horizontally. The ribs in the PBD panel are symmetrical from top to bottom, which makes this panel ideal as a roof liner.

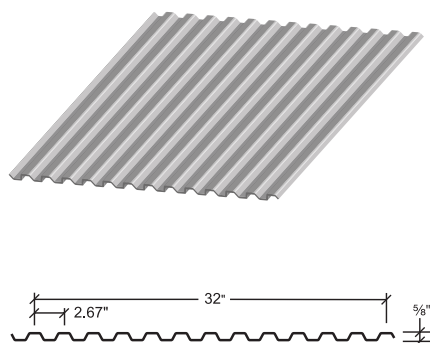

PRODUCT SPECIFICATIONS

Applications: Roof and Wall

Coverage Widths: 32"

Rib Spacing: 2.67" on center

Rib Height: 5/8"

Minimum Slope: 3:12

Panel Attachment: Exposed
Fastening System

Gauges: 26 (Standard); 29, 24,
22 (Optional)

Finishes: Smooth (standard);
Embossed (optional)

Coatings: Galvalume Plus®,
Signature® 200, Signature® 300



EXPOSED FASTENING SYSTEMS

PBD

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Fortify Building Solutions reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at fortifybuildingsolutions.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.

© 2024 Fortify Building Solutions™, part of Cornerstone Building Brands, Inc. ALL RIGHTS RESERVED. 1502249991108/RevA/MS/0424