


## STANDING SEAM METAL ROOFING

# LOKSEAM®

**Note:** Produced on-site at select locations as Secure-Seam® or SL175 panel.

LokSeam® is a snap-together standing seam roof system with a 1 3/4" tall vertical rib, for use on roofs with a minimum slope of 3:12. LokSeam® panels are available in 12", 16" and 18" widths. LokSeam® panels can be installed over open framing or a solid substructure and are capable of transitioning from roof to fascia with the use of a rib cover. LokSeam® does not require a solid substructure for support.

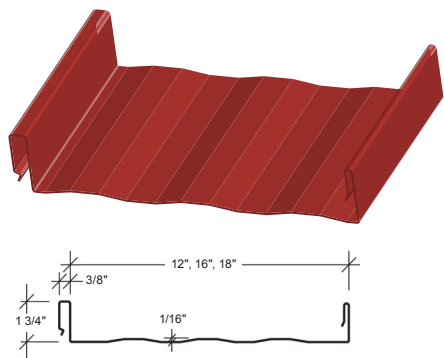

### PRODUCT SPECIFICATIONS

**Applications:** Roof

**Coverage Widths:** 12", 16", 18"

**Minimum Slope:** 3:12

**Panel Attachment:** Concealed Fastening System, Standard and UL90 Clips

**Gauges:** 24 (standard); 22 (12", 16", 18"), 26 (12") (optional)

**Finishes:** Striated (standard); Embossed Striated (optional)

**Coatings:** Galvalume Plus®, Signature® 200, Signature® 300, Signature® 300 Metallic

# STANDING SEAM METAL ROOFING

# LOKSEAM®

CATEGORY	CHARACTERISTIC	TEST METHOD*	PURPOSE	RESULT
ENVIRONMENTAL	Air Leakage	ASTM E283	Determines the air leakage rates of exterior windows, curtain walls, and doors under specified air pressure differences across the specimen	0.0000 cfm/ft² at 6.24 psf static pressure 0.239 cfm/ft² at 15.00 psf static pressure
	Water Penetration	ASTM E331	Determines the resistance of exterior windows, curtain walls, skylights, and doors to water penetration when water is applied under uniform static air pressure difference	No uncontrolled water penetration through the panel joints at a static pressure of 13.24 psf
	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
FIRE RESISTANCE	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
	Room Fire Performance	UL 263	Standard for Fire Tests of Building Construction and Materials. Requires installation over a non-combustible substrate to qualify for Class A rating. Installation over a combustible substrate qualifies for Class C rating.	For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819.
STRUCTURAL	Uplift Resistance	ASTM E 1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
ROOF LISTINGS	Roof Performance Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof coverings materials	Class 90 Rating - Construction Number 254, 255, 261, 303, 342, 343, 414, 436, 445, 446, 448, 486, 508A, 543 and 544.
	Roof Performance Florida Approval	ASTM E 1592 FM 4471 UL 790	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 42380.15, 42380.16, 42382.6
	Roof Performance Texas Department of Insurance	UL 580 UL 1897	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio and Willacy.	See RC-61 and RC-526

\* New Fortify Building Solutions manufacturing facilities may be in process of obtaining UL compliance.

Please notify your Sales Representative prior to placing an order if UL is required to ensure your material is manufactured in the appropriate facility.

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Fortify Building Solutions reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at [fortifybuildingsolutions.com](https://fortifybuildingsolutions.com). Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.

© 2024 Fortify Building Solutions, part of Cornerstone Building Brands, Inc. ALL RIGHTS RESERVED. 1502249991103/RevD/MS/1224